

Back bar refrigeration. Two door options.

Ventilated cooling / R290 refrigerant / 45 mm insulation



JBB02RS



JBC02RG


Model	JBB02RS	JBC02RG
Doors	2 solid doors	2 glass doors
Net / gross capacity (L)	209 / 281	209 / 281
Temperature range (°C)	0 / +8	0 / +8
Energy efficiency class	B	B
Energy use (kWh/year)	767	887
Body W x D x H (mm)*	1460 x 515 x 830	1460 x 515 x 830
Height with feet (mm)	860	860
Internal W x D x H (mm)	980 x 360 x 710	980 x 360 x 710
Net / gross weight (kg)	65 / 80	72 / 97
Power (W) / current (A)	320 / 1.7	320 / 1.7
Refrigerant / charge (g)	R290 / 60	R290 / 60
Shelves / max. load (kg)	4 / 55	4 / 55
Shelf size (mm)	412 x 400	412 x 400
Defrost	Air	Air
Interior lighting	Not specified	LED

* Body dimensions exclude feet. Interior: SS430. Exterior: base-coated board; galvanized rear panel.


Climate class 4: 30 °C / 55% RH. Supply: 220-240 V / 50 Hz / 1 phase. Thermostat: Dixell / Carel.

Original dimensional drawings | Front and side views

JBB02RS

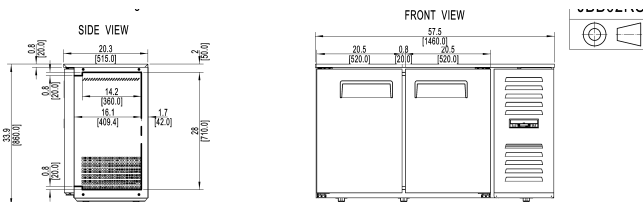

JBC02RG

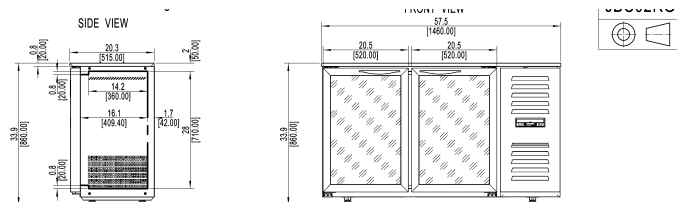

Sources: replacement Atosa internal product database; supplied product photographs and original dimensional drawings.



Back bar refrigeration. Two door options.

Ventilated cooling / R290 refrigerant / 45 mm insulation



JBB03RS



JBC03RG


Model	JBB03RS	JBC03RG
Doors	3 solid doors	3 glass doors
Net / gross capacity (L)	315 / 434	315 / 434
Temperature range (°C)	0 / +8	0 / +8
Energy efficiency class	B	B
Energy use (kWh/year)	883	1048
Body W x D x H (mm)*	2000 x 515 x 830	2000 x 515 x 830
Height with feet (mm)	860	860
Internal W x D x H (mm)	1520 x 360 x 710	1520 x 360 x 710
Net / gross weight (kg)	82 / 100	95 / 113
Power (W) / current (A)	320 / 1.7	320 / 1.7
Refrigerant / charge (g)	R290 / 60	R290 / 60
Shelves / max. load (kg)	6 / 55	6 / 55
Shelf size (mm)	412 x 400	412 x 400
Defrost	Air	Air
Interior lighting	Not specified	LED

* Body dimensions exclude feet. Interior: SS430. Exterior: base-coated board; galvanized rear panel.


Climate class 4: 30 °C / 55% RH. Supply: 220-240 V / 50 Hz / 1 phase. Thermostat: Dixell / Carel.

Original dimensional drawings | Front and side views

JBB03RS

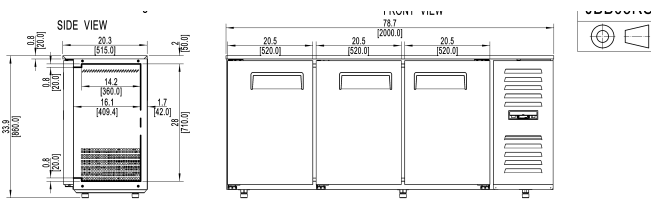

JBC03RG

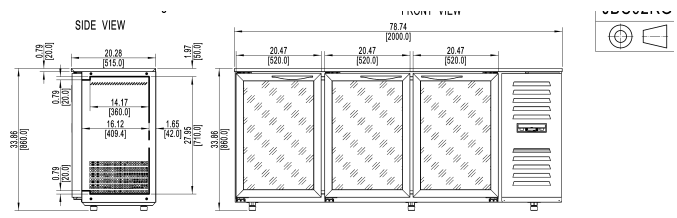

Sources: replacement Atosa internal product database; supplied product photographs and original dimensional drawings.

